

Kia ka wah 4.6 on electrical installation instructions

Install and install the product Please read this installation
manual carefully
Please keep this manual properly

Installation Precautions

Before installing the tailgate, check the status of the original tailgate (the door gap is stable)

Check the appearance of the vehicle before installation to take pictures of the scratches and inform the owner

After the product is installed, it is necessary to perform tailgate learning to work properly.

All the pictures in this manual are for reference only. Pictures and objects may differ, but the installation method is the same.

In order to facilitate your installation, please read the instruction manual of the product carefully before installation; care should be taken to protect the surface of your car and prevent scratches during installation.

Please check regularly that all accessories connected with the car are loose to ensure safe use.



1. Remove the original car trim



2. Remove the original car upper ball head, the installation I left superior ball head, the ball head with a gasket we deserve



3. Remove the original car bottom bracket, we lower left bracket, installation poles (the line ends of the poles down)



4. Remove the upper ball head, the original car installed at the upper ball head, the ball head and a gasket we deserve



5. Remove the original car right bracket, we lower bracket, installation poles (the line ends of the poles down)



6. Remove the original car stopper



7. Hall thread through the rubber plug



8. Remove the trim at the bottom of the main drive, unplug the original car 25 a fuse



9. With our power plug



10. In the main drive side remove the plaque, find the ground




11. At the bottom of the main driving this OBD seat for our CBD socket



12. In the main driving a second sliding door to remove the plaque, find the control



13. Central Line by white line (from left to right for the first row of the second hole)

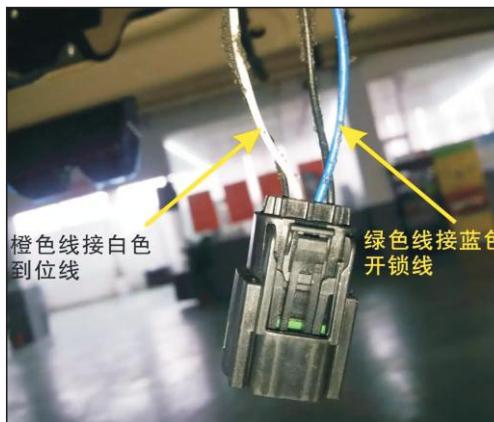

14. At the tail door locks unplug the saddle to take the orange line in the seat of the white line, green line after the blue line



15. Abort the original screw, remove the original car lock, installed on our electric absorption, use the original car screws



16. Electric door suction line go line to end cover plate



17. Hall line, control line, the power cord according to color a pair we control box



18. Install the original car trim cover lay, our company special stern door switch

| Fault phenomenon | Troubleshooting method |
|---|--|
| The original car remote control did not work | Yellow control line is connected |
| Not working after installation is complete | 1. Check whether the positive power supply is connected with 12V~16V 2. Check if the power line fuse is inserted 3. check whether the ground is connected |
| Guan Wei Men Pass not in place | 1. Whether the left and right brackets of the struts are installed in reverse 2. Whether the control box sockets are inserted well 3 whether the bracket is replaced with our special screws 4. There are two vinyl glues on the left and right sides of the original tailgate cover. |
| The original car remote controller cannot be closed | Whether there is learning after loading, the first time you need to install a car, you need to press the rear door. Press key to learn once |
| The tailgate can't go halfway up | 1. Whether the left and right brackets of the struts are installed in reverse 2. Whether the control box sockets are inserted well 3 whether the bracket is replaced with our special screws Disclaimer |